


1 Bar = 0,1MPa

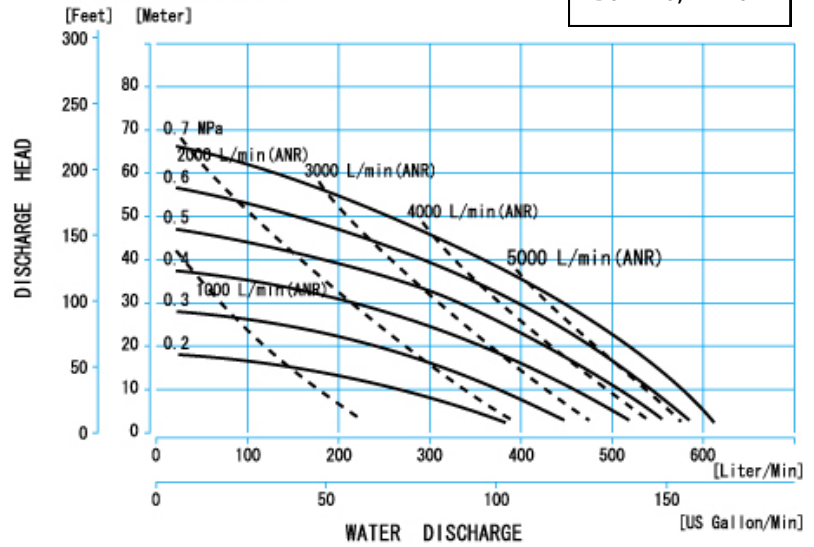

TECHNICAL DATA

Air supply pressure	0,2 -0,7	MPa	Max. viscosity (neg. suc.)	10.000	Cp
Max. discharge volume/cycle	2100	Cc	Max. viscosity (flooded suction.)	30.000	Cp
Max. discharge volume	630	L/min	Max. air consumption	6000	NL/min
Max. discharge pressure	0,7	MPa	Max. noise level	82	dB(a)
Max. size of solids	8	mm	Operating temp. ambient	70	°C
Max. suction lift dry	PTFE fitted	4,5	m	Max operating temp. fluid	
Max. suction lift wet	PTFE fitted	8,1	m	Diaphragm compound	
Max. fluid inlet pressure	PTFE fitted	0,03	MPa	Diaphragm compound	PTFE 100 °C
Max. suction lift dry	Rubber fitted		m	Diaphragm compound	
Max. suction lift wet	Rubber fitted		m		
Max. fluid inlet pressure	Rubber fitted		MPa	Net Weight	Type A ALU 36,0 Kg

Caution! Data based on water (1 Cp)

Wetted parts: Pump chambers + manifolds

ADC12 - Aluminum

Motor

ADC12 - Aluminum

